



KONICA MINOLTA

Series LINEUP



Giving Shape to Ideas



bizhub

Change the way you do business.

Take your business further with the expanded bizhub product line.

Business is always on the move, and it moves fast. To stay ahead, Konica Minolta presents an expanded bizhub product line. Our high-performance machines boast a wealth of features and advances designed to ensure that your workplace is more collaborative, more productive and more connected. With so many models to choose from, there's always a bizhub to keep your business moving.

The solutions of

Document Solutions For The Way You Work

Konica Minolta's Solutions of i include our extensive lineup of MFPs, printers and software applications designed for you, the individual.

<http://www.solutions-of-i.com>



Contents

bizhub C754/C654	3
bizhub C554/C454/C364/C284/C224	4
bizhub C200	5
bizhub C35	6
bizhub 751/601	7
bizhub 501	8
bizhub 42/36	9
bizhub 423/363/283/223	10
bizhub 215/195	11
bizhub 211/163	12
bizhub 185/165	13
bizhub PRESS C8000	14
bizhub PRESS C7000/C8000	15
bizhub PRESS 1250/1052	16
bizhub PRO 951	17
Enterprise Suite	18
i-Option	18
System Options	20

bizhub C754/C654



bizhub C754 A4 Colour/B&W: 60/75 pages/min

bizhub C654 A4 Colour/B&W: 60/65 pages/min

bizhub C754/C654 Specifications

Resolution: 1,200dpi x 1,200dpi

Maximum Original Size: A3 (11" x 17")

Paper Size: SRA3-A5, B6S, A6S Thick Paper, Foolscap¹ (8-1/2" x 13-1/2", 200 mm x 330 mm, 8-1/8" x 13-1/4", 8-1/2" x 13", 8-1/4" x 13", 8" x 13"), 8K, 16K, Long Length Paper (210 x 457.3 mm to 297 x 1,200mm)

Warm-Up Time: 22 sec. or less

First Copy Time²: bizhub C754: Colour/B&W: 5.3/3.6 sec. or less, bizhub C654: Colour/B&W: 5.3/3.7 sec. or less

Copy Speed: bizhub C754: Colour/B&W: 60/75 cpm, bizhub C654: Colour/B&W: 60/65 cpm

Paper Supply: Std.: 3,650 sheets, Max: 6,650 sheets

Paper Weight: Tray 1-4: 52-256g/m², Multiple Bypass Tray: 52-300g/m²

Power Source: AC230, 10A (50 to 60Hz)

Power Consumption: 2.1kW or less

Dimensions (W x D x H): 650 x 799 x 1,155mm

Weight: Approx. 221kg

¹ Set by Customer Engineer.

² A4/full size/using the first tray/scanning from the original glass surface.

Controller Specifications

■Printing Function

	Standard	IC-414 (Optional)*
Type	Embedded	Embedded
Speed	Same as Copy Speed	Same as Copy Speed
Resolution	1,200dpi x 1,200dpi	600dpi, 1,200dpi
Printer Languages	PCL5e/c Emulation, PCL XL Ver. 2.1 Emulation, PostScript 3 Emulation (3016), XPS Ver. 1.0	Adobe PostScript3 version3019, PCL6/PCL5
Network Protocol	TCP/IP, IPX/SPX (NDS support), SMB (NetBEUI), LPD, IPP1.1, SNMP, HTTP	Ethernet (Apple Talk, TCP/IP), HTTP/HTTPS, SSL/TLS for HTTPS, SMB, Port9100 (Bi-Directional), IPP, LDAP, IPV6, SNMP v3
Operating System	Windows 2000 / XP / XP 64bit / Vista / Vista 64bit / 7 / 7 64bit / Server 2003 / Server 2003 64bit / Server 2003 R2 / Server 2003 R2 64bit / Server 2008 / Server 2008 64bit, Mac OS 9.2 or later / Mac OS X 10.2 or later / Mac OS X10.4 (Intel) or later, Linux	Windows XP / Server 2003 / Vista / Server 2008 / Server 2008 R2 64bit / 7 Mac OS X 10.4.11, 10.5.x, 10.6.x
Interface	Ethernet (10BASE-T/100BASE-TX/1000BASE-T), USB 1.1, USB 2.0, USB Host	Ethernet (10BASE-T/100BASE-TX/1000BASE-T), USB

* Optional Video Interface Kit VI-506 is required.

■Scanning Function

	Standard
Original Size	Max. A3 (11" x 17")
Resolution	Push: 200dpi, 300dpi, 400dpi, 600dpi Pull: 100dpi, 200dpi, 300dpi, 400dpi, 600dpi
Speed	Simplex: 90opm, Duplex: 180opm
Functions	Scan to E-Mail, Scan to FTP, Scan to BOX (HDD), Scan to PC (SMB), Network TWAIN, Scan to WebDAV, Scan to Me, Scan to Home, Scan to USB, Scan to Scan Server, Scan to Web Service (WSD-Scan), Device Profile for Web Services (DPWS)
Interface	Ethernet (10BASE-T/100BASE-TX/1000BASE-T)
Data Format	TIFF, JPEG, PDF, Compact PDF, XPS, Compact XPS, PPTx, Searchable PDF, PDF/A, Linearised PDF

■Internet Fax Function

Transmission Mode: Full Mode

Original Size: A3, B4, A4

Resolution: 200 x 100 dpi, 200 x 200 dpi, 400 x 400 dpi, 600 x 600 dpi

Colour: Support Colour Internet Fax

Data Format: Send: TIFF-F, Receive: TIFF-F

Colour/Grey Scale: TIFF (RFC3949 Profile-C)

Fax Specifications (Optional)

Original Size: Max. A3 (Long Length Support: Max.1,000mm)

Recording Size: Max. A3 (Long Length Max.1,000mm - following the page division)

Transmission Standard: Super G3

Transmission Speed: Less than 3 sec. (A4, V.34, 33.6 kbps, JBIG)

Compression: MH/MR/MMR/JBIG



bizhub C554 A4 Colour/B&W:	55 pages/min
bizhub C454 A4 Colour/B&W:	45 pages/min
bizhub C364 A4 Colour/B&W:	36 pages/min
bizhub C284 A4 Colour/B&W:	28 pages/min
bizhub C224 A4 Colour/B&W:	22 pages/min



bizhub C554/C454/C364/C284/C224 Specifications

Resolution: 1,200dpi x 1,200dpi

Maximum Original Size: A3 (11" x 17")

Paper Size: SRA3-A5, B6 Lengthwise, A6 Lengthwise Thick paper, Foolscap¹ (8-1/2" x 13-1/2", 200 mm x 330 mm, 8-1/8" x 13-1/4", 8-1/2" x 13", 8-1/4" x 13", 8" x 13"), 8K, 16K, Long Length Paper (210 x 457.3 mm to 297 x 1,200mm)

Warm-Up Time: C554: 22 sec. or less, C454: 25 sec. or less, C364: 20 sec. or less, C284: 20 sec. or less, C224: 20 sec. or less

(The time required to start printing when both the main power and sub-power switches are turned from OFF to ON.)

C554: 22 sec. or less, C454: 25 sec. or less, C364: 20 sec. or less, C284: 18 sec. or less, C224: 18 sec. or less
(The time required to start printing when the main power switch is ON and the sub-power switch is turned from OFF to ON.)

First Copy Time: bizhub C554: Colour/B&W: 4.6/4.1 sec. or less, bizhub C454: Colour/B&W: 5.5/4.6 sec. or less,

bizhub C364: Colour/B&W: 6.9/5.3 sec. or less, bizhub C284: Colour/B&W: 7.7/5.9 sec. or less, bizhub C224: Colour/B&W: 8.3/6.9 sec. or less

Copy Speed (Colour and B/W): bizhub C554: 55 cpm, bizhub C454: 45 cpm, bizhub C364: 36 cpm,

bizhub C284: 28 cpm, bizhub C224: 22 cpm

Paper Supply: Std.: 1,150 sheets, Max: C554/C454: 6,650 sheets, C364/C284/C224: 3,650 sheets

Paper Weight: Tray 1/2: 52-256g/m², Multiple Bypass Tray: 60-300g/m²

Power Source: C554/C454: AC220-240 V, 9A (50-60Hz), C364/C284/C224: AC220-240 V, 8A (50-60Hz)

Power Consumption: C554/C454: 2.0 kW, C364/C284/C224: 1.58 kW

Dimensions (W x D x H): C554/C454: 615 x 685 x 921 mm, C364/C284/C224: 615 x 685 x 779 mm

Weight: C554/C454: Approx. 101 kg, C364/C284/C224: Approx. 85 kg

¹ Set by Customer Engineer.

² A4/full size/using the first tray/scanning from the original glass surface.

Controller Specifications

■Printing Function

	Standard	IC-414 (Optional)*
Type	Embedded	Embedded
Speed	Same as Copy Speed	Same as Copy Speed
Resolution	1,200 x 1,200 dpi	600dpi, 1,200dpi
Printer Languages	PCL5e/c, PCL6 (Ver. 3.0), XPS Ver. 1.0	Adobe PostScript3 version3019, PCL6/PCL5
Network Protocol	TCP/IP, IPX/SPX (NDSsupport), SMB (NetBEUI), LPD, IPP1.1, SNMP, HTTP	Ethernet (Apple Talk, TCP/IP), HTTP/HTTPS, SSL/TLS for HTTPS, SMB, Port9100 (Bi-Directional), IPP, LDAP, IPV6, SNMP v3
Operating System	Windows 2000 / XP / XP 64bit / Vista / Vista 64bit / 7 / 7 64bit / Server 2003 / Server 2003 64bit / Server 2003 R2 / Server 2003 R2 64bit / Server 2008 / Server 2008 64bit / Mac OS 9.2 / Mac OS X 10.2/10.3/10.4 (Power PC) / Mac OS X 10.5 (Power PC/Intel) / Mac OS X 10.6/10.7 (Intel), Linux	Windows XP / Server 2003 / Vista / Server 2008 / Server 2008 R2 64bit / 7 / Mac OS X 10.4.11, 10.5.x, 10.6.x
Interface	Ethernet (10BASE-T/100BASE-TX/1000BASE-T), USB 1.1, USB 2.0, USB Host	Ethernet (10BASE-T/100BASE-TX/1000BASE-T), USB

■Scanning Function

* Optional Video Interface Kit VI-506 is required.

	Standard
Original Size	Max. A3 (11" x 17")
Resolution	Push: 200dpi, 300dpi, 400dpi, 600dpi Pull: 100dpi, 200dpi, 300dpi, 400dpi, 600dpi
Speed	B&W/Colour: 80 opm (300 dpi, A4/Letter Crosswise)
Functions	Scan to E-Mail, Scan to FTP, Scan to BOX (HDD), Scan to PC (SMB), Network TWAIN, Scan to WebDAV, Scan to Me, Scan to Home, Scan to USB, Scan to Scan Server, Scan to Web Service (WSD-Scan), Device Profile for Web Services (DPWS)
Interface	Ethernet (10BASE-T/100BASE-TX/1000BASE-T)
Data Format	TIFF, JPEG, PDF, Compact PDF, XPS, Compact XPS, PPTx, Searchable PDF, PDF/A, Linearised PDF

■Internet Fax Function

Transmission Mode: Full Mode

Original Size: A3, B4, A4

Resolution: 200 x 100 dpi, 200 x 200 dpi, 400 x 400 dpi, 600 x 600 dpi

Colour: Support Colour Internet Fax

Data Format: Send: TIFF-F, Receive: TIFF-F

Colour/Grey Scale: TIFF (RFC3949 Profile-C)

Fax Specifications (Optional)

Original Size: Max. A3 (Long Length Support: Max.1,000mm)

Recording Size: Max. A3 (Long Length Max.1,000mm - following the page division)

Transmission Standard: Super G3

Transmission Speed: Less than 3 sec. (A4, V.34, 33.6 kbps, JBIG)

Compression: MH/MR/MMR/JBIG

bizhub C200



A4 Colour/B&W: 20/20 pages/min



bizhub C200 Specifications

Resolution: 600dpi x 600dpi
Maximum Original Size: A3 (11" x 17")
Paper Size: A3-A5, A3 Wide (12" x 18"), A6S
Warm-Up Time: Colour: 40 sec. or less, B/W: 37 sec. or less
First Copy Time: Colour: 13.5 sec. or less, B/W: 10 sec. or less
Copy Speed: Colour and B/W: 20 cpm (A4), 9.8 cpm (A3)
Paper Supply: Std.: 250 sheets, Max: 3,350 sheets
Paper Weight: Trays 1-4: 60-256g/m², Multiple Bypass Tray: 60-256g/m²
Power Source: AC220-240V, 6A (50/60Hz)
Power Consumption: 1.25kW or less
Dimensions (W x D x H): 620 x 688 x 648mm
Weight: Approx. 68kg

Controller Specifications (Standard)

■Printing Function

Type: Embedded
Speed: same as Copy Speed (when using the same original)
Resolution: 600dpi x 600dpi
Printer Languages: PCL5e/c Emulation, PCL XL ver.3.0 Emulation, Post Script3 Emulation (3015)
Network Protocol: TCP/IP, LPD, IPX/SPX (NDS supported), SMB (NetBEUI), IPP 1.0, EtherTalk
Operating System: Server: Windows 2000, Windows Server 2003, Windows Server 2003 x64 Edition
Client: Windows 2000/XP/XP x64 Edition/Vista/Vista x64 Edition, Mac OS 9.2 or later/Mac OS X ver. 10.2-10.4 (10.5)/Mac Intel OS X 10.4 (10.5)
Interface: Ethernet (10BASE-T/100BASE-TX), USB 2.0 Compatible

■Scanning Function

Original Size: Max. A3
Resolution: Push: 200dpi, 300dpi, 400dpi, 600dpi/Pull: 100dpi, 200dpi, 300dpi, 400dpi, 600dpi
Speed: B&W: 40 opm (300dpi), Colour: 20 opm (300dpi)
Functions: Scan to E-mail, Scan to FTP, Scan to SMB (Network TWAIN (via Ethernet TCP/IP))
Interface: Ethernet (10BASE-T/100BASE-TX)
Data Format: TIFF (#2 standard, No colour TIFF), PDF (V1.3 standard), JPEG

■Internet Fax Function*

Transmission Mode: Full Mode
Original Size: Max. A3
Resolution: 200dpi x 100dpi, 200dpi x 200dpi, 400dpi x 400dpi, 600dpi x 600dpi
Colour: Not available

* Optional Fax Kit FK-507 is required.

Fax Specifications (Optional)

Original Size: Max. A3
Recording Size: Max. A3
Transmission Standard: ECM/G3
Transmission Speed: Less than 3 sec. (A4, V.34, 33.6kbps, JBIG)
Compression: MH/MR/MMR/JBIG

bizhub C35



A4 Colour/B&W: 30/30 pages/min



bizhub C35 Specifications

Resolution: 600dpi x 600dpi

Maximum Original Size: A4 or 8.5" x 14"

Paper Size: A4-B6

Warm-Up Time: 45 sec. or less

First Copy Time*: Colour: 12 sec., B/W: 10.1 sec.

Copy Speed: Colour and B/W: 30 cpm (A4)

Paper Supply: Std.: 350 sheets, Max: 1,350 sheets

Paper Weight: 60-210g/m²

Power Source: AC220-240V (50-60Hz)

Power Consumption: 1.3kW or less

Dimensions (W x D x H): 555 x 508 x 550mm

Weight: Approx. 39kg

**A4/full size/using the first tray/scanning from the original glass surface.*

Controller Specifications (Standard)

■Printing Function

Type: Embedded

Speed: same as Copy Speed (when using the same original)

Resolution: 600dpi x 600dpi

Printer Languages: PostScript3 Emulation, PCL5e/c/PCL6, XPS, PDF Direct Printing, JPEG/TIFF/XPS Direct Print

Network Protocol: TCP/IP, EtherTalk, IPX/SPX, UPD, IPv6

Operating System: PCL6: Windows 2000, Windows XP/XP 64bit, Windows Server 2003/Server 2003 64bit, Windows Vista/ Vista 64bit, Windows Server 2008/Server 2008 64bit, Windows 7 (Not certified by WHQL)

PS3: Windows 2000, Windows XP/XP 64bit, Windows Server 2003/Server 2003 64bit, Windows Vista/Vista 64bit, Windows Server 2008/Server 2008 64bit, Mac OSX (10.2.8/10.3.9/10.4/10.5), LINUX, Windows 7 (Not certified by WHQL)

XPS: Windows Vista, Windows Server 2008, Windows 7 (Not certified by WHQL)

Interface: Ethernet (10Base-T/100Base-TX/1000Base-T), USB 2.0 (High Speed)

■Scanning Function

Original Size: Max. A4/Legal

Resolution: 150dpi x 150dpi, 200dpi x 200dpi, 300dpi x 300dpi, 600dpi x 600dpi (Network TWAIN: 150dpi, 300dpi, 600dpi, 1200dpi, 2400dpi, 4800dpi)

Speed: B&W/Colour: 30 opm (300dpi)

Functions: Scan to E-mail, Scan to FTP, Scan to SMB, Scan to HDD, Scan to WebDAV, Scan to USB, WS-Scan, Windows WIA Scan

Interface: Ethernet (10Base-T/100Base-TX/1000Base-T), USB Host

Data Format: TIFF, PDF, Compact PDF, Encrypted PDF, JPEG*, XPS Page Setting

**JPEG is single page only.*

Fax Specifications (Standard)

Original Size: Max. A4/Legal

Recording Size: Max. A4/Legal(Long Length Max.1,000mm - following the page division)

Transmission Standard: Super G3

Transmission Speed: Less than 3 sec. (A4, V.34, 33.6kbps, JBIG)

Compression: MH/MR/MMR/JBIG

bizhub 751/601



* bizhub 601 only

bizhub 751 A4 B/W: 75 pages/min

bizhub 601 A4 B/W: 60 pages/min



bizhub 751/601 Specifications

Resolution: 1,200dpi (equivalent) x 600dpi

Maximum Original Size: A3 or Ledger (Max. 314 x 458mm)

Paper Size: A3-B6

Warm-Up Time: bizhub 751: 5 minutes or less, bizhub 601: 4.5 minutes or less

First Copy Time: bizhub 751: 2.9 sec. or less, bizhub 601: 3.3 sec. or less

Copy Speed: bizhub 751: 75 cpm (A4)/35 cpm (A3), bizhub 601: 60 cpm (A4)/30 cpm (A3)

Paper Supply: Std.: 3,600 sheets, Max: 7,600 sheets

Paper Weight: Trays 1-4: 60-200g/m², Multiple Bypass Tray: 50-256g/m²

Power Source: AC220-240V, 10A (50Hz)

Power Consumption: 1.5kW or less

Dimensions (W x D x H): 886 x 856 x 1,140mm (Main unit + ADF)

Weight: Approx. 224kg

Controller Specifications

■Printing Function (Standard)

Type: Embedded

Speed: bizhub 751: 75 ppm (A4), bizhub 601: 60 ppm (A4)

Resolution: 2,400dpi (equivalent) x 600dpi

Printer Languages: PCL 6, PostScript 3 Emulation

Network Protocol: TCP/IP, IPX/SPX (NDS), SMB (Net BEUI), LPD, IPP 1.1, SNMP, HTTP, AppleTalk

Operating System: Windows NT 4.0 SP6/2000 SP3/XP/XP x64 Edition, Server 2003/Server 2003 x64 Edition/Vista or later, Mac OS 9.2 or later/Mac OS X 10.2.3,4/10.4 Intel or later

Interface: Standard: Ethernet (10BASE-T/100BASE-TX), Optional: IEEE1284, USB 2.0

■Scanning Function (Standard)

Original Size: Max. A3

Resolution: 200dpi x 200dpi, 300dpi x 300dpi, 400dpi x 400dpi, 600dpi x 600dpi

Speed: 75 opm (600 dpi, 300 dpi), 65 opm (400 dpi, 200 dpi)

Functions: Scan to E-mail, Scan to HDD, Scan to FTP, Scan to SMB, Scan to WebDAV, Scan to USB, Network TWAIN

Interface: Ethernet (10BASE-T/100BASE-TX/1000BASE-T)

Data Format: PDF, TIFF, XPS

■Internet Fax Function (Optional)*

Transmission Mode: Full Mode

Original Size: Max. A3

Resolution: 200dpi x 100dpi, 200dpi x 200dpi, 400dpi x 400dpi, 600dpi x 600dpi

Data Format: TIFF-F

* Optional HD-510 and IC-208 are required.

Fax Specifications (Optional)

Original Size: Max. A3

Receiving Size: A3-A5

Transmission Standard: Super G3

Transmission Speed: Less than 3 sec. (A4, V.34, JBIG)

Compression: MH/MR/MMR/JBIG

bizhub 501



bizhub 501 A4 B/W: 50 pages/min



bizhub 501 Specifications

Resolution: 600dpi x 600dpi

Maximum Original size: A3 or Ledger

Paper Size: A3-A5

Warm-up Time: Less than 60 sec.

First Copy Time: Less than 3.2 sec.

Copy Speed: 50 cpm (A4)/27 cpm (A3)

Paper Supply: Std.: 1,150 sheets, Max.: 5,650 sheets

Paper Weight: Tray: 60-105g/m², Multiple Bypass Tray: 50-210g/m²

Power Source: 220-240V, 10A (50Hz)

Power Consumption: less than 1.56kW

Dimensions (W x D x H): 685 x 823.7 x 895mm

Weight: Approx. 97kg

Controller Specifications (Optional)

■Printing Function

Type: Embedded

Speed: 50 ppm (A4)

Resolution: 2,400dpi (equivalent) x 600dpi

Printer Languages: PCL 6, Adobe PostScript 3 Emulation

Network Protocol: TCP/IP, IPX/SPX (NDS), SMB (Net BEUI), LPD, IPP1.1, SNMP, HTTP, AppleTalk

Operating System: Windows NT 4.0 SP6/2000 SP3/XP/XP x64 Edition/Server 2003/Server 2003 x64 Edition/Vista or later, Mac OS 9.2 or later/OS X (10.2/10.3/10.4)/Mac Intel OS X 10.4 or later

Interface: Std.: Ethernet (10BASE-T/100BASE-TX/1000BASE-TX), USB 1.1, Opt.: USB 2.0

■Scanning Function

Original Size: Max. A3

Resolution: 200dpi x 200dpi, 300dpi x 300dpi, 400dpi x 400dpi, 600dpi x 600dpi

Speed: 50 opm (600dpi x 600dpi), 70 opm (400/300/200dpi x 400/300/200dpi)

Functions: Scan to E-mail, Scan to HDD, Scan to FTP, Scan to SMB, Scan to WebDAV, Scan to USB, Network TWAIN

Interface: Ethernet (10BASE-T/100BASE-TX/1000BASE-TX)

Data Format: PDF, TIFF, XPS

Fax Specifications (Optional)

Original Size: Max. A3

Receiving Size: Max. A3

Transmission Standard: Super G3

Transmission Speed: Less than 3 sec. (A4, V.34, JBIG)

Compression: MH/MR/MMR/JBIG

bizhub 42/36



bizhub 42 A4 B&W: 42 pages/min

bizhub 36 A4 B&W: 36 pages/min



bizhub 42/36 Specifications

Resolution: 4,800dpi (equivalent) x 600dpi

Maximum Original Size: A4 or Legal (216 x 356 mm)

Paper Size: A4, B5, A5, B6, A6

Warm-Up Time:

45 sec. or less (The time required to start printing when both the main power and sub-power switches are turned from OFF to ON.)

35 sec. or less (The time required to start printing when the main power switch is ON and the sub-power switch is turned from OFF to ON.)

First Copy Time: 8.7 sec., ADF: 7.9sec.

Copy Speed: bizhub 42: 42 cpm, bizhub 36: 36 cpm

Paper Supply: Std.: 1,150 sheets, Max: 3,150 sheets

Paper Weight: Main unit: 60-90g/m², Multiple Bypass Tray: 60-210g/m²

Power Source: AC100 V, 15A (50/60Hz)

Power Consumption: 1.5 kW or less

Dimensions (W x D x H): 558 x 632 x 807mm

Weight: Approx. 63 kg

Controller Specifications

■Printing Function (Standard)

Type: Embedded

Speed: same as Copy Speed (when using the same original)

Resolution: 4,800dpi (equivalent) x 600dpi

Printer Languages: PostScript 3 compatible (3016), PCL6 (XL3.0), PCL5e/c, PDF1.7/JPEG/TIFF/XPS1.0 Direct print

Network Protocol: TCP/IP, IPX/SPX (NDS compatible), SMB (NetBEUI), UDP, AppleTalk

Operating System: PCL: Windows XP / XP x64 / Vista / Vista x64 / 7 / 7 x64 / Server2003 / Server 2003 x64 / Server2008 / Server2008 x64 / Server 2008 R2

PS: Windows XP / XP x64 / Vista / Vista x64 / 7 / 7 x64 / Server2003 / Server 2003 x64 / Server2008 / Server2008 x64 / Server 2008 R2

Mac OS (10.2.8, 10.3.9, 10.4, 10.5, 10.6) [Includes Intel Macs]

XPS: Windows Vista / Vista x64 / 7 / 7 x64 / Server2008 / Server2008 x64 / Server 2008 R2

Interface: Standard: Ethernet (10BASE-T/100BASE-TX/1000BASE-T), USB 2.0

■Scanning Function (Standard)

Original Size: Max. A4 or Legal

Resolution: 150dpi/200dpi/300dpi/600dpi

Speed (B&W/Colour): 30 opm (A4, 300dpi)

Interface: Ethernet (10BASE-T/100BASE-TX/1000BASE-T)

Data Format: PDF, TIFF, Compact PDF, JPEG, XPS

■Internet Fax Function (Optional)

Original Size: A4

Resolution: Sending: Standard: 200 x 100dpi, Fine: 200 x 200dpi,

Receiving: 200 x 100dpi, 204 x 98dpi (80 x 38.5dot/cm)

200 x 200dpi, 204 x 196dpi (80 x 37.7dot/cm)

200 x 300dpi

200 x 400dpi, 204 x 391dpi (80 x 154dot/cm)

400 x 100dpi, 408 x 391dpi (160 x 154dot/cm)

Data Format: Monochrome TIFF

Fax Specifications (Optional)

Original Size: Platen Glass: Max. A4, Legal, ADF: 215.9mm x 1,000mm

Recording Size: Max. A4, Legal

Documents exceeding 1,000mm cannot be received.

Following page division settings, recorded documents up to 1,000mm are recorded.

Transmission Standard: ECM/Super G3

Compression: MH/MR/MMR/JBIG

bizhub 423/363/283/223



* bizhub 423 only

bizhub 423 A4 B&W: 42 pages/min

bizhub 363 A4 B&W: 36 pages/min

bizhub 283 A4 B&W: 28 pages/min

bizhub 223 A4 B&W: 22 pages/min



bizhub 423/363/283/223 Specifications

Resolution: 1,800dpi (equivalent) x 600dpi

Maximum Original Size: A3 (11" x 17")

Paper Size: A3-A5, B6S, A6S Thick Paper

Warm-Up Time:

30 sec. (The time required to start printing when both the main power and sub-power switches are turned from OFF to ON.)

12 sec. (The time required to start printing when the main power switch is ON and the sub-power switch is turned from OFF to ON.)

bizhub 363/283/223 only:

Without HD: 25 sec. (The time required to start printing when both the main power and sub-power switches are turned from OFF to ON.)

12 sec. (The time required to start printing when the main power switch is ON and the sub-power switch is turned from OFF to ON.)

First Copy Time: bizhub 423/363: 3.6 sec., bizhub 283/223: 4.2 sec.

Copy Speed: bizhub 423: 42 cpm, bizhub 363: 36 cpm, bizhub 283: 28 cpm, bizhub 223: 22 cpm

Paper Supply: Std.: 1,150 sheets, Max: 3,650 sheets

Paper Weight: Tray 1-2: 60-90g/m², Multiple Bypass Tray: 60-210g/m²

Power Source: AC220-240V, 7A (50-60Hz)

Power Consumption: 1.5kW or less

Dimensions (W x D x H): bizhub 423/363: 623 x 799 x 816mm, bizhub 283/223: 623 x 794 x 700mm

Weight: bizhub 423/363: 78kg, bizhub 283/223: 66kg

Controller Specifications (Standard)

■Printing Function

Type: Embedded

Speed: same as Copy Speed (when using the same original)

Resolution: 1,800dpi (equivalent) x 600dpi

Printer Languages: PCL 5e/c, PCL XL, PostScript 3

Network Protocol: TCP/IP, IPX/SPX (NDS support), SMB (Net BEUI), LPD, IPP1.1, SNMP, HTTP

Operating System: Windows 2000 SP3/XP/XP x64 Edition/Vista/Vista x64 Edition/Win 7/Server 2003/Server 2003 x64 Edition/Server 2008/Server 2008 64 Edition, Mac OS 9.2 (PPD), OS X 10.2,3,4,5/10.4,5 Intel, Linux

Interface: Standard: 10BASE-T/100BASE-TX/1000BASE-T

■Scanning Function

Original Size: Max. A3

Resolution: Push: 200dpi/300dpi/400dpi/600dpi, Pull: 100dpi/200dpi/300dpi/400dpi/600dpi

Speed (B&W/Colour): 42/24 opm (A4, 600dpi), 70/70 opm (A4, 300dpi)

Functions: Scan to E-mail, Scan to HDD, Scan to FTP, Scan to WebDAV, Scan to SMB, Scan to USB memory

Interface: 10BASE-T/100BASE-TX/1000BASE-T

Data Format: PDF, TIFF, Compact PDF, JPEG

■Internet Fax Function

Transmission Mode: Full Mode

Original Size: A3, B4, A4

Resolution: B/W: 200dpi x 100dpi, 200dpi x 200dpi, 400dpi x 400dpi, 600dpi x 600dpi

Colour/Grey Scale: 200dpi x 200dpi, 400dpi x 400dpi, 600dpi x 600dpi

Colour: Support Colour Internet Fax

Data Format: Send: TIFF-F, Receive: TIFF-F

Colour/Grey Scale: TIFF (RFC3949 Profile-C)

Fax Specifications (Optional)

Original Size: Max. A3

Recording Size: Max. A3

Transmission Standard: Super G3

Compression: MH/MR/MMR/JBIG

bizhub 215 / 195



bizhub 215 A4 B/W: 21 pages/min

bizhub 195 A4 B/W: 19 pages/min



bizhub 215/195 Specifications

Resolution: 600dpi x 600dpi

Maximum Original Size: A3 or Ledger (11" x 17")

Paper Size: A3-A5

Warm-Up Time: 15 sec. or less

First Copy Time: 6.5 sec. or less

Copy Speed: bizhub 215: 21 cpm² (A4/Letter Crosswise), bizhub 195: 19 cpm (A4/Letter Crosswise)

Paper Supply: Std.: 250 sheets, Max.: 1,350 sheets

Paper Weight: 65-157g/m²

Power Consumption: 1.3kW

Dimensions (W x D x H): 570 x 570 x 458³mm, 570 x 570 x 488⁴mm

Weight: 26.5kg

¹ A4/full size/using the first tray/scanning from the original glass surface.

² 23 cpm from 2nd Feed Cassette.

³ To the face of original glass.

⁴ Including Original Cover.

Controller Specifications

■Printing Function

	GDI (Standard)	IC-209 (Optional)
Type	Embedded	Mount
Speed	bizhub 215: 21 ppm (A4), bizhub 195: 19 ppm (A4)	bizhub 215: 21 ppm (A4), bizhub 195: 19 ppm (A4)
Resolution	600dpi x 600dpi	1,200 or 600dpi x 600dpi
Operating System	Server: Windows 2003Server / 2008Server / 2008ServerR2 Windows 2003Server x64 Edition / 2008Server x64 Edition Client: Windows XP / Vista / 7 Windows XP / Vista / 7 x64 Edition	Server: Windows 2003Server / 2008Server / 2008ServerR2 Windows 2003Server x64 Edition / 2008Server x64 Edition Client: Windows XP / Vista / 7 Windows XP / Vista / 7 x64 Edition
Interface	Standard: USB 2.0 Compatible Optional: Ethernet (10BASE-T/100BASE-TX)*	Ethernet (10BASE-T/100BASE-TX)

* Optional Network Interface Card NC-504 is required.

■Scanning Function (Standard)

Original Size: Max. A3 or Ledger (11" x 17")

Functions: TWAIN / WIA: Real Time Mode(Pull), Scan to USB memory(Standard; bizhub 215 only)

Network Scan (Option card: IC-209 or NC-504): Scan To FTP, Scan To PC (SMB), Scan To E-mail, Network TWAIN

Interface: Ethernet 10Base-T/100Base-TX (Option card: IC-209 or NC-504), USB2.0 (Standard), USB Host (Standard; bizhub 215 only)

Data Format: PDF, TIFF, JPEG

Fax Specifications (Optional)

Original Size: Scanner: Max. A3, Option DF-625: Max. (W x L) 297 x 1000mm

Recording Size: Max. A3 (Max 1000mm, printed according page partition setting)

Transmission Standard: ECM/G3

Transmission Speed: Approx. 3 sec. (A4, V.34, 33.6kbps, JBIG)

Compression: MH/MR/MMR/JBIG

bizhub 211/163



bizhub 211 A4 B/W: 21 pages/min

bizhub 163 A4 B/W: 16 pages/min

bizhub 211/163 Specifications

Resolution: 600dpi x 600dpi

Maximum Original Size: A3

Paper Size: A3-A5

Warm-Up Time: bizhub 211: 15 sec. or less, bizhub 163: 30 sec. or less

First Copy Time: Flatbed scan: 7 sec. or less, ADF scan: 11 sec. or less

Copy Speed: bizhub 211: 21 cpm (A4), 20 cpm (Letter), bizhub 163: 16 cpm (A4/Letter)

Paper Supply: Std.: 250 sheets, Max.: 1,350 sheets

Paper Weight: Main Body: 60-90g/m², Bypass Tray: 60-157g/m²

Power Source: bizhub 211: 220-240V, 5.5A, bizhub 163: 220-240V, 4.5A (50/60Hz)

Power Consumption: bizhub 211: 1.25kW, bizhub 163: 1.05kW

Dimensions (W x D x H): bizhub 211: 599 x 620 x 487¹mm, bizhub 163: 599 x 620 x 520²mm

Weight: bizhub 211: Approx. 38kg, bizhub 163: Approx. 39kg (Including Original Cover)

¹ To the face of original glass.

² Including Original Cover.

Controller Specifications

■Printing Function

	GDI (Standard)	IC-206 (Optional)
Type	Embedded	Mount
Speed	bizhub 211: 21 ppm (A4, 300dpi), 12 ppm (A4, 600dpi) bizhub 163: 16 ppm (A4, 300dpi), 12 ppm (A4, 600dpi)	bizhub 211: 21 ppm (A4, 600dpi) bizhub 163: 16 ppm (A4, 600dpi)
Resolution	300dpi x 300dpi, 600dpi x 600dpi	600dpi x 600dpi, 1,200dpi (equivalent) x 600dpi
Printer Languages	GDI	PCL 6/5e
Network Protocol*	TCP/IP, IPX/SPX	TCP/IP, IPX/SPX
Operating System	Windows 98SE/Me/2000/XP/Server 2003	Windows 98SE/Me/2000/XP/Server 2003
Interface	Standard: USB 2.0 Compatible Optional: Ethernet (10BASE-T/100BASE-TX)*	USB 2.0 Compatible Ethernet (10BASE-T/100BASE-TX)

* Optional Network Interface Card NC-503 is required.

■Local Twain Scanning (Standard)/Network Twain Scanning Function (Optional)*

Original Size: Max. A3

Resolution: 150dpi x 150dpi, 300dpi x 300dpi, 600dpi x 600dpi

Interface: USB 2.0 Compatible

* Optional Network Interface Card NC-503 or Image Controller IC-206 are required.

■Internet Fax Function (Optional)*

Transmission Mode: Simple Mode

Original Size: A3-A4

Resolution: Send: 204dpi x 98dpi, 204dpi x 196dpi, 204dpi x 391dpi,

Receive: 200dpi x 100dpi, 200dpi x 200dpi, 204dpi x 98dpi, 204dpi x 196dpi, 204dpi x 391dpi, 408dpi x 391dpi

Data Format: TIFF-F

* Optional Fax Kit FK-506 and either Network Interface Card NC-503 or Image Controller IC-206 are required.

Fax Specifications (Optional)

Original Size: Max. A3, Flatbed: Max. 297 (W) x 1,000 (Length) mm, ADF: Max. 297 (W) x 900 (Length) mm

Recording Size: A3-A5

Transmission Standard: Super G3

Transmission Speed: Approx. 3 sec.

Compression: MH/MR/MMR/JBIG

bizhub 185/165



bizhub 185 A4 B/W: 18 pages/min

bizhub 165 A4 B/W: 16 pages/min



bizhub 185/165 Specifications

Resolution: 600dpi x 600dpi

Maximum Original Size: A3 (11" x 17")

Paper Size: A3-A5 (11" x 17"-5-1/2" x 8-1/2")

Warm-up Time: Less than 29 sec.

First Copy Time: Less than 8 sec.

Copy Speed: bizhub 185: 18 cpm, bizhub 165: 16 cpm

Paper Supply: Std.: 250 sheets, Max.: 350 sheets

Paper Weight: 64-157g/m²

Power Source: AC220-240V, 3.5A (50/60Hz)

Power Consumption: 800W or less

Dimensions (W x D x H): 570 x 531 x 449mm

Weight: 23.6kg

Controller Specifications (Standard)

■GDI Printer Controller

Type: Embedded

Speed: bizhub 185: 18 ppm, bizhub 165: 16 ppm

Resolution: 300dpi x 600dpi, 600dpi x 600dpi

Printer Language: GDI

Operating System: Server: Server 2003/Server 2003 x64 Edition/Server 2008/Server 2008 x64 Edition

Client: Windows XP/XP x64 Edition, Windows Vista/Vista x64 Edition, Server 2003/Server 2003 x64 Edition, Server 2008/Server 2008 x64 Edition, Server 2008 R2 x64 Edition, Windows 7/Windows 7 x64 Edition

Interface: USB 1.1/2.0

■Scanning Function

Original Size: Max. A3 (11" x 17")

Resolution: 150dpi x 150dpi, 300dpi x 300dpi, 600dpi x 600dpi

Interface: USB1.1/2.0 equivalent

bizhub PRESS

C8000



A4 Colour/B&W: 80 pages/min



bizhub PRESS C8000 Specifications

Resolution: 3,600dpi (equivalent) x 1,200dpi

Maximum Original Size: A3

Paper Size: 330 x 487 to 140 x 182mm

Warm-up Time: 420 sec. or less

First Copy Time: Colour: 6.5 sec. or less, B/W: 5.5 sec. or less

Copy Speed: Colour and B/W: 80 cpm (A4), 80 cpm (A3)

Paper Supply: Std.: 1,500 sheets, Max.: 10,760 sheets

Paper Weight: Main unit: 64-300g/m², PF-704/705: 64-350g/m²

Power Source: 220-240V, 24A (50-60Hz)

Power Consumption: Less than 6kW

Dimensions (W x D x H): 900 x 950 x 1,319mm

Weight: 450kg (main unit only)

Controller Specifications (Optional)

■Printing Function

	Fiery IC-306 ² (EFI)	Fiery IC-307 ³	Creo IC-601 ⁴ (Konica Minolta)
Type	Server	Server	Embedded
Speed¹	80 ppm (A4/Letter)		
Resolution	1,200dpi x 1,200dpi, 600dpi x 600dpi		
Printer Languages	PostScript3 CPSI3017, PDF1.7, TIFF, PPML, VPS	PostScript3 CPSI3017, PDF1.7, TIFF, PPML, PPML/VDX, VPS	PostScript3 CPSI3019, PDF1.7, TIFF (2 nd), PPML, PCL5c/6 (2 nd), XPS (2 nd)
Network Protocol	TCP/IP, SNMP, IPP, FTP, SMB, AppleTalk (EtherTalk), Bonjour	TCP/IP, SMB, LPR, Bonjour	TCP/IP, IPX/SPX, Net BEUI, AppleTalk (EtherTalk), IPP, WSD
Operating System	Windows 2000 Windows XP Windows Server2003 Windows Vista Windows 7 Windows Server2008 MacOSX 10.3.9 MacOSX 10.4 or later	Windows XP Windows Server2003 Windows Vista Windows 7 Windows Server2008 MacOSX 10.3.9 MacOSX 10.4 or later	Windows 2000 Windows XP Windows Server2003 Windows Vista Windows 7 Windows Server2008 MacOSX 10.4 or later
Interface	Ethernet (10BASE-T/ 100BASE-TX/1000BASE-T)	Ethernet (10BASE-T/ 100BASE-TX/1000BASE-T)	Ethernet (10BASE-T/ 100BASE-TX/1000BASE-T)

¹ Printing speed may vary according to the paper weight.

² Upgrade kit UK-102 (dongle) is necessary.

³ Upgrade kit UK-103 (dongle) is necessary.

⁴ Hard Disk Kit HD-514 and Preview Kit PH-101 are required.

■Scanning Function (Optional)¹

	Fiery IC-306 ² (EFI)	Fiery IC-307 ³	Creo IC-601 ⁴ (Konica Minolta)
Original Size	Max.: 303 x 438mm		As C8000 system
Resolution	200dpi x 200dpi, 300dpi x 300dpi, 400dpi x 400dpi, 600dpi x 600dpi		
Speed	40 opm		
Data Format	PDF, TIFF, JPEG		PDF, TIFF, JPEG, XPS

¹ Optional PF-705 is required

² Upgrade kit UK-102 (dongle) is necessary.

³ Upgrade kit UK-103 (dongle) is necessary.

⁴ Hard Disk Kit HD-514 and Preview Kit PH-101 are required.

bizhub PRESS

C7000/C6000



bizhub PRESS C7000 A4 Colour/B&W: 71 pages/min

bizhub PRESS C6000 A4 Colour/B&W: 60 pages/min

bizhub PRESS C7000/6000 Specifications

Resolution: 3,600dpi (equivalent) x 1,200dpi

Maximum Original Size: A3 (11" x 17")

Paper Size: 330 x 487 to 140 x 182mm

Warm-up Time: 420 sec. or less

First Copy Time: Colour: 7.6/7.8 sec. or less, B/W: 5.9/6.0 sec. or less

Copy Speed: Colour and B/W: 71/60 cpm (A4), 70/60 cpm (Letter)

Paper Supply: Std.: 1,500 sheets, Max.: 7,500 sheets

Paper Weight: Main unit: 64-256g/m², PF-602: 64-300g/m²

Power Source: 220-240V, 24A (50-60Hz)

Power Consumption: Less than 4.6kW

Dimensions (W x D x H): 760 x 992.7 x 1,075.6mm

Weight: 353kg (main unit only)

Controller Specifications (Optional)

■ Printing Function

	Fiery IC-306 (EFI)	Creo IC-601* (Konica Minolta)
Type	Server	Embedded
Speed	71/60 ppm (A4), 70/60 ppm (Letter)	
Resolution	3,600dpi (equivalent) x 1,200dpi	
Printer Languages	PostScript3 CPSI3017, PDF1.7, TIFF, PPML, VPS	PostScript3 CPSI3019, PDF1.7, TIFF, PPML, PCL5c/6, XPS
Network Protocol	TCP/IP, SNMP, IPP, FTP, SMB, AppleTalk (EtherTalk), Bonjour	TCP/IP, IPX/SPX, Net BEUI, AppleTalk (EtherTalk), IPP, WSD
Operating System	Windows 2000 Windows XP Windows Server2003 Windows Vista Windows 7 Windows Server2008 MacOSX 10.3.9 or later	Windows 2000 Windows XP Windows Server2003 Windows Vista Windows 7 Windows Server2008 MacOSX 10.3.9 or later
Interface	Ethernet (10BASE-T/100BASE-TX/1000BASE-T)	Ethernet (10BASE-T/100BASE-TX/1000BASE-T)

* Hard Disk Kit HD-514 and Preview Kit PH-101 are required.

■ Scanning Function

	Fiery IC-306 (EFI)	Creo IC-601 (Konica Minolta)
Original Size	Max.: 303 x 438mm	
Resolution	200dpi x 200dpi, 300dpi x 300dpi, 400dpi x 400dpi, 600dpi x 600dpi	
Speed	40 opm	
Data Format	PDF, TIFF, JPEG	PDF, TIFF, JPEG, XPS

bizhub PRESS 1250 / 1052



bizhub PRO 1250 A4 B/W: 125 pages/min
bizhub PRO 1052 A4 B/W: 105 pages/min



bizhub PRESS 1250/1052 Specifications

Resolution: 1,200dpi x 1,200dpi

Maximum Original size: A3 (11" x 17")

Paper Size: SRA3, A3 to B5, A5S, Tab paper, Custom (182 x 139-324 x 463 mm)

Warm-up Time: Less than 480 sec.

First Copy Time: 1250: 2.8 sec., 1052: 3.0 sec.

Copy Speed: 1250: 120 cpm, 1052: 105 cpm

Paper Supply: Std.: 3,000 sheets, Max.: 14,000 sheets

Paper Weight: Main unit: 40-300g/m², PF-703/ PF-706 (middle tray only): 40-350g/m²

Power Source: 220-240V, 15A

Power Consumption: 5.0kW or less (Main unit + PF-706 + FS-532)

Dimensions (W x D x H): 990 x 780 x 1,234mm (with DF), 1,211 x 910 x 1,454 (including operation panel)

Weight: 364kg (Main unit)

Controller Specifications (Standard)

■Printing Function

Type: Embedded

Speed: 125ppm

Resolution: 1,200dpi x 1,200dpi, 600dpi x 600dpi

Printer Languages: PCL5e/6, PostScript3 (3019), PDF Ver1.7, TIFF Ver. 6 Emulation, PPML (Ver2.2)

Network Protocol: TCP/IP, IPX/SPX (NDS support), SMB (NetBEUI), IPP, EtherTalk

Operating System: PCL: Windows XP Home Edition/Professional, XP Home Edition/Professional 64bit, Server 2003 Standard/Enterprise, Server 2003 Standard/Enterprise 64bit, Vista/Vista 64bit, Server 2008/Server 2008 64bit, 7/7 64bit

PS/PS-Plugin: Windows XP Home Edition/Professional, XP Home Edition/Professional 64bit, Server 2003 Standard/Enterprise, Server 2003 Standard/Enterprise 64bit, Vista/Vista 64bit, Server 2008/Server 2008 64bit, 7/7 64bit, Mac OS X 10.3 (PS PPD only), 10.4 (PPC/Intel), 10.5 (PPC/Intel), 10.6 (Intel)

Interface: 10Base-T/100Base-TX/1000Base-T, USB2.0 (Hi-Speed)

■Scanning Function

Original Size: Max. A3 (11" × 17")

Resolution: 1200 × 1200 dpi equiv., 200dpi x 200dpi, 300dpi x 300dpi, 400dpi x 400dpi, 600dpi x 600dpi

Speed: 96opm

Interface: Ethernet (10BASE-T/100BASE-TX/1000BASE-T)

Data Format: TIFF, PDF, Linearised PDF, XPS

bizhub PRO 951



A4 B/W: 95 pages/min



bizhub PRO 951 Specifications

Resolution: 1,200dpi x 1,200dpi

Maximum Original Size: A3 (11" × 17")

Paper Size: SRA3, A3 to B5, A5S, Tab paper, Custom (182 x 139-324 x 463 mm)

Warm-up Time: 390 sec. or less

First Copy Time: 3.4 sec. or less

Copy Speed: 95 cpm

Paper Supply: Std.: 3,000 sheets, Max.: 9,000 sheets

Paper Weight: Main body: 40-300g/m², PF-706 (middle tray only): 40-350g/m²

Power Source: 220-240 V, 15A

Power Consumption: 3.6kW or less (Main unit + PF-706 + FS-532)

Dimensions (W x D x H): 990 x 780 x 1,234mm (with DF), 1,211 x 910 x 1,454 (including operation panel)

Weight: 364kg (Main unit)

Controller Specifications (Standard)

■Printing Function

Type: Embedded

Speed: 95ppm

Resolution: 1,200dpi x 1,200dpi, 600dpi x 600dpi

Printer Languages: PCL5e/6, PostScript3 (3019), PDF Ver1.7, TIFF Ver. 6 Emulation, PPML (Ver2.2)

Network Protocol: TCP/IP, IPX/SPX (NDS support), SMB (NetBEUI), IPP, EtherTalk

Operating System: PCL: Windows XP Home Edition/Professional, XP Home Edition/Professional 64bit, Server 2003 Standard/Enterprise, Server 2003 Standard/Enterprise 64bit, Vista/Vista 64bit, Server 2008/Server 2008 64bit, 7/7 64bit

PS/PS-Plugin: Windows XP Home Edition/Professional, XP Home Edition/Professional 64bit, Server 2003 Standard/Enterprise, Server 2003 Standard/Enterprise 64bit, Vista/Vista 64bit, Server 2008/Server 2008 64bit, 7/7 64bit, Mac OS X 10.3 (PS PPD only), 10.4 (PPC/Intel), 10.5 (PPC/Intel), 10.6 (Intel)

Interface: 10Base-T/100Base-TX/1000Base-T, USB2.0 (Hi-Speed)

■Scanning Function

Original Size: Max. A3 (11" × 17")

Resolution: 1200 × 1200 dpi equiv., 200dpi x 200dpi, 300dpi x 300dpi, 400dpi x 400dpi, 600dpi x 600dpi

Speed: 96opm

Interface: Ethernet (10BASE-T/100BASE-TX/1000BASE-T)

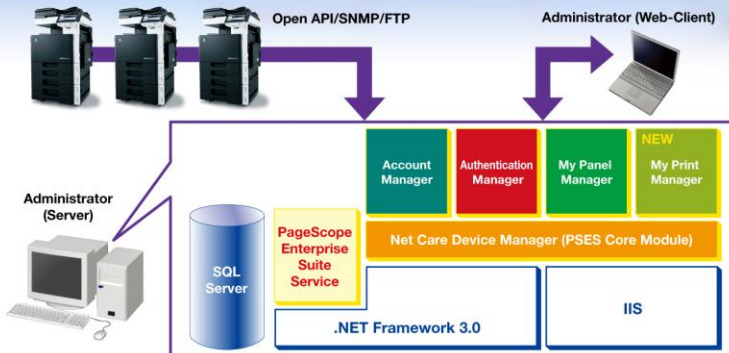
Data Format: TIFF, PDF, Linearised PDF, XPS

i-Option

PageScope Enterprise Suite (PSES) and i-Option are Konica Minolta's solution offering. Synergising the potential of our MFPs, this software provides you with solutions to empower your business by offering centralised management of accounting, authentication and device information.



System Configuration (Full Install)



i-Option Specifications

■ Web Browser Function

Browser Engine: NetFront

Protocol: HTTP, HTTPS, TCP/IP

Markup/Script: HTML, CSS, JavaScript

Image Formats: JPEG, BMP, PNG, GIF, GIF animation, PDF

SSI/TLS Versions: SSL 2.0, SSL 3.0, TLS 1.0

Character Encoding: Japanese (Shift_JIS), Japanese (ISO-2022-LP), Japanese (EUC-JP), Simplified Chinese (GB2312), Traditional Chinese (Big5), Western (ISO-8859-1), Unicode (UTF-8)

Display Modes: Normal, Just-Fit Rendering, Smart-Fit Rendering

Option: Adobe Reader LE

■ Photo Data for Image Panel

File Type: BMP format, 24-bit colour, uncompressed

Image Size: 48 x 48 pixels

Data Size: 6,966 Bytes

* Photo data may not be scaled for registration.

System Requirements

■ Server

Pentium 4 2GHz or higher

512MB or higher

500MB or higher (for installation)

■ Supported operating systems

Windows 2000 Professional (SP4 or later)

Windows 2000 Advanced Server (SP4 or later)

Windows XP Professional (SP3 or later)

Windows XP Professional x64 Edition (SP2 or later)

Windows Server 2003, Standard Edition (SP2 or later)

Windows Server 2003, Standard x64 Edition (SP2 or later)

Windows Server 2003, Enterprise Edition (SP2 or later)

Windows Server 2003, Enterprise x64 Edition (SP2 or later)

Windows Server 2003 R2, Standard Edition (SP2 or later)

Windows Server 2003 R2, Standard x64 Edition (SP2 or later)

Windows Server 2003 R2, Enterprise Edition (SP2 or later)

Windows Server 2003 R2, Enterprise x64 Edition (SP2 or later)

Windows Vista Business (SP2 or later) *

Windows Vista Enterprise (SP2 or later) *

Windows Vista Ultimate (SP2 or later) *

Windows Server 2008 Standard (SP2 or later) *

Windows Server 2008 Enterprise (SP2 or later) *

Windows Server 2008 Standard without Hyper-V (SP2 or later) *

Windows Server 2008 Enterprise without Hyper-V (SP2 or later) *

Windows 7 Professional *

Windows 7 Enterprise *

Windows 7 Ultimate *

Windows Server 2008 R2 Standard

Windows Server 2008 R2 Enterprise

* 32-bit (x86) and 64-bit (x64) editions of Windows are supported.

■ Web Browser

Microsoft Internet Explorer 6.0 or later

Mozilla Firefox 3.5 or later

Apple Safari 2.0 or later (Mac OS only)

■ Other Requirements

Microsoft .NET Framework 2.0 or later

Microsoft Internet Information Services 5.0 or later

Microsoft SQL Server 2000 Standard Edition/Enterprise Edition























Microsoft SQL Server 2005 Express Edition/Standard Edition/Enterprise Edition

Microsoft SQL Server 2008 Express Edition/Standard Edition/Enterprise Edition

For more information, please visit the PageScope Enterprise Suite/i-Option Web site at

<http://www.biz.konicaminolta.com/solutions/pses/index.html>

System Options Colour

		bizhub C754/C654	bizhub C554/C454/ C364/C284/C224	bizhub C200	bizhub C35	bizhub C10
 Automatic Document Feeder	Double-Sided Single-Sided	Std.	Std. ^{*1} /DF-701 ^{*2} /DF-624 ^{*1}	DF-612	Std.	Std.
 Original Cover		N/A	OC-511 ^{*2}	OC-508	N/A	N/A
 Automatic Duplex Unit		Std.	Std.	AD-505	Std.	Std.
 Multi Bypass		Std. (150 sheets)	Std. (150 sheets)	MB-502 (100 sheets)	N/A	N/A
 Finisher		FS-535 FS-534	FS-535 ^{*3} / FS-534 FS-533 ^{*4}	N/A	N/A	N/A
 Saddle Stitch		SD-512 ^{*1} SD-511 ^{*2}	SD-512 ^{*5} SD-511 ^{*6}	N/A	N/A	N/A
 Punch		PK-521 ^{*1} /PK-520 ^{*2} Included ZU-606 ^{*1}	PK-521 ^{*5} /PK-520 ^{*6} Included ZU-606 ^{*5}	N/A	N/A	N/A
 Z-Fold		ZU-606 ^{*1}	ZU-606 ^{*1}	N/A	N/A	N/A
 Trim		N/A	N/A	N/A	N/A	N/A
 Cover Insertion		PI-505 ^{*1}	PI-505 ^{*5}	N/A	N/A	N/A
 Job Separator		JS-602 ^{*1}	JS-602 ^{*5} JS-506	JS-505	N/A	N/A
 Paper Feed Cabinet (Unit)		N/A	PC-110 PC-210 PC-410	PC-105 PC-104 ^{*1} PC-204 ^{*1}	PF-P08 ^{*1}	Lower paper feed unit
 Large Capacity Unit		LU-204 LU-301	LU-204 LU-301	PC-405 ^{*1}	N/A	N/A
 Desk		N/A	DK-705 DK-510	DK-504 ^{*1}	N/A	N/A
 Controller	embedded (mount) external	Std./IC-414 ^{*3}	Std./IC-414 ^{*7}	Std.	Std.	Std.
 HDD (Main Unit)		N/A Std. (250GB)	N/A Std. (250GB)	N/A N/A	N/A N/A	N/A N/A
 Memory (Main Unit)		UK-204 (2GB)	UK-204 (2GB)	EM-310 (512MB)	N/A	N/A
 Fax		FK-511	FK-511	FK-507	Std.	Std.
 Network Interface		Included in controller	Included in controller	Included in controller	Included in controller	Included in controller
 Network Scan		Included in controller	Included in controller	Included in controller	Included in controller	Included in controller
 Local Interface		Included in controller	Included in controller	Included in controller	Included in controller	Included in controller
 Others		Authentication Unit AU-102 ^{*4} /AU-201 ^{*5,7} Working Table WT-506/WT-509 ^{*8} Banner Paper Setting Guide MK-715 Security Kit SC-508 ^{*9} Assist Handle AH-101	Authentication Unit AU-102 ^{*8} /AU-201 ^{*9} Working Table WT-506 Banner Paper Setting Guide MK-730 Security Kit SC-508 ^{*10} Assist Handle AH-101	Assist Handle AH-101 Multi Bypass Tray MB-502 Fax Multi Line ML-504	Working Table WT-P01 Desk DK-P01	

*1 For FS-535.
*2 For FS-534.
*3 VI-506 is required.
*4 Finger vein.
*5 IC card.
*6 WT-506 or WT-509 is required.
*7 WT-506 or WT-509 or MK-735 is required.
*8 For Upright Panel.
*9 Two are required.























*1 C554/C454 only.
*2 For C364/C284/C224.
*3 C554 only.
*4 Inner finisher.
*5 For FS-535.
*6 For FS-534.
*7 VI-506 is required.
*8 WT-506 is required.
*9 WT-506 or MK-735 is required.
*10Two are required.

*1 PC-105 is required.

*1 A maximum of two optional PF-P08 paper feed units may be added.

* Some products are not available in some areas.

System Options B/W

		bizhub 751/601	bizhub 501	bizhub 42/36	bizhub 423/363/283/223	bizhub 215/195
	Automatic Document Feeder	Double-Sided	Std.	Std.	Std.	DF-621
		Single-Sided				DF-625
	Original Cover		N/A	N/A	N/A	OC-509
	Automatic Duplex Unit		Std.	Std.	Std.	AD-509
	Multi Bypass		Std. (100 sheets)	Std. (150 sheets)	Std. (150 sheets)	MB-505 (100 sheets)
	Finisher		FS-524, FS-525 FS-610	FS-522 FS-523	FS-529	FS-527 N/A
	Saddle Stitch		FS-610	SD-507	N/A	SD-509*2 N/A
	Punch		PK-502, PK-503 PK-505	PU-501 Included FS-522	N/A	PK-517*2 N/A
	Z-Fold		ZU-605	N/A	N/A	N/A
	Trim		N/A	N/A	N/A	N/A
	Cover Insertion		PI-504	N/A	N/A	N/A
	Job Separator		N/A	JS-502	N/A	JS-603*2 JS-505*3 N/A
	Paper Feed Cabinet (Unit)		N/A	PC-206 PC-407	PC-211	PC-109 PC-208 PF-507*1
	Large Capacity Unit		LU-405 LU-406	LU-203	N/A	PC-409 N/A
	Desk		N/A	DK-506	DK-511	DK-508 DK-706 DK-707 DK-708
	Controller	embedded (mount)	IC-208	IC-207	Std.	Std.
		external	N/A	N/A	N/A	N/A
	HDD (Main Unit)		HD-510 (60GB)	HD-509 (60GB)	N/A	HD-516*4 (250GB)
	Memory (Main Unit)		N/A	N/A	1.5GB	UK-203 (1GB) 128MB
	Fax		FK-502	FK-502*1	FK-509	FK-508*5 FK-510
	Network Interface		Included in controller	Std.	Std.	Included in controller NC-504
	Network Scan		Included in controller	Std.	Std.	Included in controller NC-504 or IC-209
	Local Interface		EK-703	Std.	Std.	Included in controller Std.
	Others		Shift Tray SF-602 Output Tray OT-505 Security Kit SC-506 Authentication Unit AT-101*1/AT-201*2	Security Kit SC-505 Mailbin Kit MT-502 Output Tray OT-504 Fax Multi Line ML-503	Working Table WT-501	Authentication Unit AU-102*6/AU-201*7 Working Table WT-506 Banner Paper Setting Guide MK-713 Security Kit SC-507 Assist Handle AH-101

*1 Finger vein.
*2 IC card.























*1 MK-708 is required.

*1 Modular Staple Finisher.
*2 For FS-527.
*3 Inner Job Separator Tray.
*4 363/283/223 only.
*5 MK-726 is required.
*6 Finger vein.
*7 IC card.

*1 Max. 4 trays.

* Some products are not available in some areas.

System Options B/W























		bizhub 211/163	bizhub 185/165	bizhub 160/ 161 Series
	Automatic Document Feeder	Double-Sided DF-605*1#2 DF-502	N/A	160/161: DF-501 160/161f: Std.
	Original Cover	OC-504	Std.	Std.*1
	Automatic Duplex Unit	AD-504*2	N/A	N/A
	Multi Bypass	MB-501 (100 sheets)	Opt. (100 sheets)	Std. (10 sheets)
	Finisher	N/A	N/A	N/A
	Saddle Stitch	N/A	N/A	N/A
	Punch	N/A	N/A	N/A
	Z-Fold	N/A	N/A	N/A
	Trim	N/A	N/A	N/A
	Cover Insertion	N/A	N/A	N/A
	Job Separator	JS-503	N/A	N/A
	Paper Feed Cabinet (Unit)	PF-502	N/A	PF-501
	Large Capacity Unit	N/A	N/A	N/A
	Desk	DK-701 DK-702 DK-703	N/A	N/A
	Controller	embedded (mount) Std./IC-206	Std.	Std.
	external	N/A	N/A	N/A
	HDD (Main Unit)	N/A	N/A	N/A
	Memory (Main Unit)	EM-103 (128MB)	32MB	EM-101 (32MB)
	Fax	FK-506	N/A	160/161: N/A 160/161f: Std.
	Network Interface	NC-503	Included in controller	NC-501
	Network Scan	NC-503 or IC-206	Included in controller	SU-502*1#2
	Local Interface	Std.	Included in controller	Std.
	Others			

*1 MK-501 is required.
*2 211 only.

*1 Not available with
160/161f.
*2 NC-501 is required.

* Some products are not available in some areas.

System Options PRO

		bizhub PRESS C8000	bizhub PRESS C7000	bizhub PRESS 1250/1052	bizhub PRO 951
 Automatic Document Feeder	Double-Sided Single-Sided	Included PF-705*1	DF-622	Std.	Std.
 Original Cover		N/A	OC-506	N/A	N/A
 Automatic Duplex Unit		Std.	Std.	Std.	Std.
 Multi Bypass		N/A	MB-504*1	N/A	N/A
 Finisher		FS-521 FS-612	FS-521 FS-612/FS-531	FS-532	FS-532
 Saddle Stitch		SD-506 Included FS-612	SD-506 Included FS-612	SD-510*1 SD-506	SD-510*1
 Punch		PK-512*2, GP-501*3	PK-512*2, GP-501*3	PK-522*1/ GP-501*2/ GP-502*2	PK-522*1
 Z-Fold		Included FD-503	Included FD-503	Included FD-503 FD-503	GP-501*2/ GP-502*2 ZU-608
 Trim		Included SD-506	Included SD-506	Included SD-510	Included SD-510
 Cover Insertion		Included FD-503 PI-502*2	Included FD-503 PI-502*2	PI-502*1*3	PI-502*1*3
 Job Separator		N/A	N/A	N/A	N/A
 Paper Feed Cabinet (Unit)		PF-704 PF-705*1	PF-602*1	PF-703 PF-706	PF-706
 Large Capacity Unit		N/A	LU-202*1	N/A	LU-409 LU-410
 Desk		N/A	N/A	N/A	N/A
 Controller	embedded (mount)	IC-601*1	IC-601*4	Std.	Std.
	external	IC-306**/IC-307*5	IC-306	N/A	N/A
 HDD (Main Unit)		HD-514*6	HD-514*5	Std. (250GB)	Std. (250GB)
 Memory (Main Unit)		N/A	N/A	Std. (768MB)	Std. (768MB)
 Fax		N/A	N/A	N/A	N/A
 Network Interface		Included in controller	Included in controller	Included in controller	Included in controller
 Network Scan		Included in controller	Included in controller	Included in controller	Included in controller
 Local Interface		Included in controller	Included in controller	Included in controller	Included in controller
 Others		Perfect Binder PB-503 2nd Fuser Unit EF-101 Relay Unit RU-506/RU-508 Large Capacity Stacker LS-505	Perfect Binder PB-503 Relay Unit RU-509/RU-506 Output Tray OT-502 Large Capacity Stacker LS-505 Working Table WT-508	Removable Hard Disk RH-101 HDD Inner-case Kit HD-511 Perfect Binder PB-503 Relay Unit RU-509/RU-510*4 Large Capacity Stacker LS-505	Removable Hard Disk RH-101 HDD Inner-case Kit HD-511

*1 Hard Disk Kit HD-514 and Preview Kit PH-101 are needed together.
*2 For FS-612.
*3 Not available in all countries.
*4 Upgrade kit UK-102 (dongle) is necessary.
*5 Upgrade kit UK-103 (dongle) is necessary.
*6 For IC-601/PF-705

*1 MB-504, LU-202, PF-602 and WT-508 cannot be attached simultaneously.
*2 For FS-612/FS-531.
*3 RU-506 is required.
*4 Hard Disk Kit HD-514 and Preview Kit PH-102 are needed together.
*5 For IC-601

*1 For FS-532.
*2 Not available in all countries.
*3 MK-732 is required, countries.
*4 Required for bizhub PRESS 1250. Required for bizhub PRESS 1052 when equipped with PI-PFU, GP-501 and GP-502.

*1 For FS-532.
*2 Not available in all countries.
*3 MK-732 is required, countries.

* Some products are not available in some areas.

Product appearance, configuration and/or specifications are subject to change without notice.

KONICA MINOLTA, the KONICA MINOLTA logo and symbol mark, "Giving Shape to Ideas", bizhub, bizhub PRO, bizhub PRESS, Magicolor, PagePro, PageScope, Simitri, Simitri HD, Simitri HD+, Simitri with Biomass, Emperon, S.E.A.D., S.E.A.D.II, Printgroove and Konica Minolta Optimised Print Services and their respective logos are registered trademarks or trademarks of KONICA MINOLTA, INC. All other brands and product names are registered trademarks or trademarks of their respective companies or organisations.



Konica Minolta copiers and multi-functional peripherals are designed with the environment in mind.

- Have Earned ENERGY STAR for Energy Efficiency
- The Use of Recycled Materials
- Production at ISO-Certified Factories



Blue Angel Mark (BAM)

To promote environmental protection and consumer awareness, Germany's "Blue Angel Mark" is awarded to products and services which are beneficial for the environment and which also fulfill high standards of occupational health and safety and fitness for use. Introduced in 1978 by the German Institute for Quality Assurance and Certification, the Blue Angel was the world's first ecological label.



About ISO 15408

Used for assessing the level of IT security a product provides, the ISO 15408 international standard sets a strict guideline for evaluating security policy, program design documents, source code, manuals, and other factors. A product qualifies for official designation as ISO/IEC 15408 compliant only when an independent testing facility under the International Common Criteria for Information Technology Security Evaluation ("Common Criteria" or CC) has determined that the product meets CC standards.

* The ISO 15408 certification applies only to IT security capabilities. This certification is NOT a product guarantee.



Requirements for safe use

- Please read and follow the instruction manual to ensure safe operation.
- Only operate using appropriate power supply and voltage.
- Connecting the earth wire to an inappropriate place may cause explosion or electric shock. Please connect accordingly.

KONICA MINOLTA, INC.

2-7-2 Marunouchi Chiyoda-ku, Tokyo, Japan

<http://www.biz.konicaminolta.com>