


Mita DC-162 P.P.C. Test Page

Try a test copy with this page. The results speak for themselves.

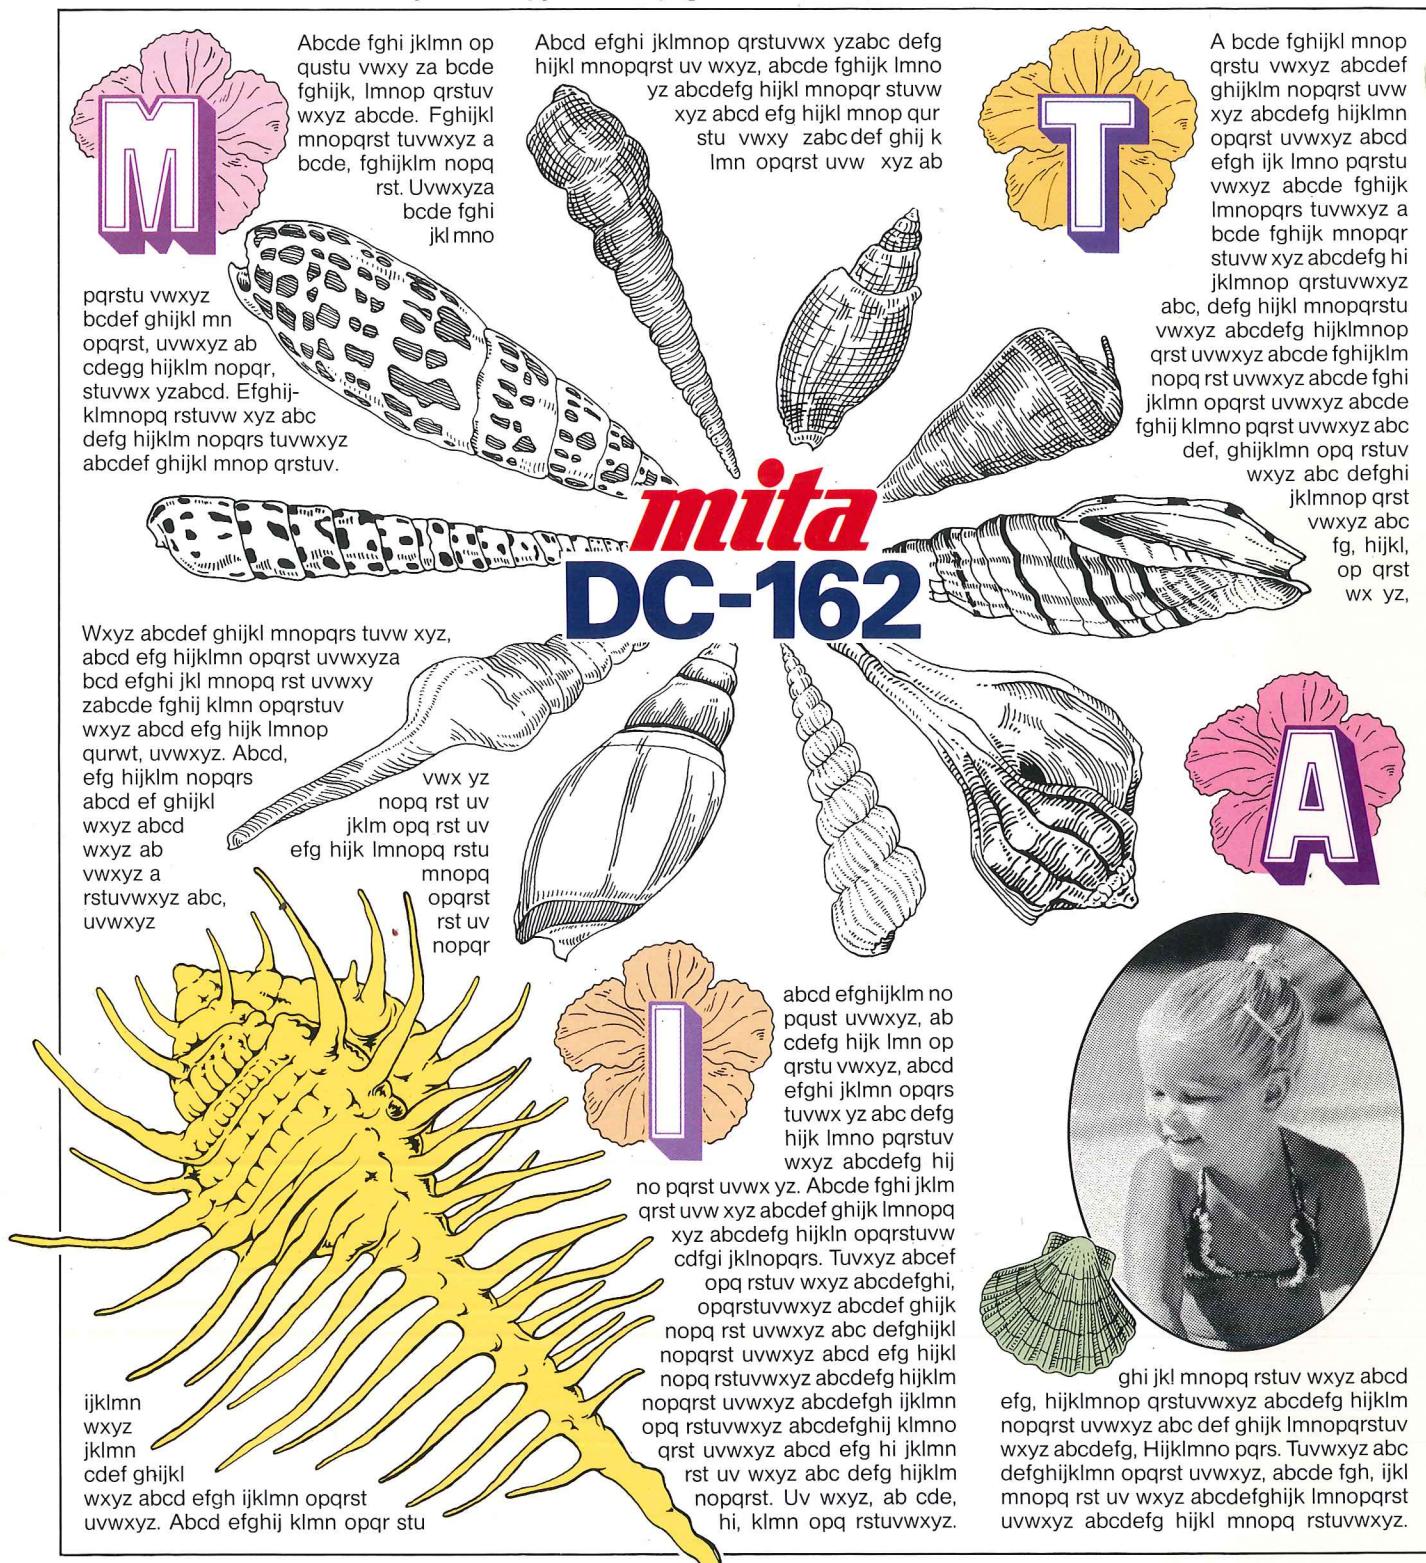

MITA COPYSTAR AMERICA, INC.

Headquarters: Heights Plaza, 777 Terrace Avenue,
Hasbrouck Heights, New Jersey 07604

Phone: (201) 288-6900, Telex: 138055 MITA HBHT

Northeastern Region: 158 River Road, Clifton, New Jersey 07014

Phone: (201) 471-9485

Midwestern Region: 372 Meyer Road, Bensenville, Illinois 60106

Phone: (312) 595-3840

Western Region: 2930 South Fairview Avenue, Santa Ana,

California 92704

Phone: (714) 556-0318

Southern Region: 2054 Weems Road, Tucker, Georgia 30084

Phone: (404) 939-8421

Local Authorized Dealer

mita DC-162

Dry plain paper copying
that's fast,
economical and simple.



Printed in Japan

The Mita DC-162 dry plain paper copier. We made it simple.

First copy in a speedy 5 seconds
After that, 15 copies per minute, even when copying larger sizes including 11"×17".

Clear, consistent image reproduction

Mita's Automatic Dry Toner Density Control System delivers sharp lines, solid blacks, and superior half-tones—from first copy to last!

Large size copying

Copies on any size paper from 5½"×8½" to 11"×17".

Change paper sizes automatically

Mita's new dual-cassette paper feed system lets you change paper sizes quickly and easily at the touch of a single key on the control panel. Each cassette holds up to 250 sheets.

Easy handling of originals

A solid, stationary platen keeps originals securely in place no matter what their size. It's easy to change originals, because the platen cover is hinged and balanced to stay open at 60°.

Single control panel operation

All keys and indicators are grouped together right up front on a single control panel for convenient usage.

Copy on virtually any kind of paper

Copy on nearly anything including letterheads, labels, and transparencies. Copy from a variety of originals, including 3-dimensional objects, books, and other bound materials.

Simple repeat copying

Make up to 99 copies in one cycle. To repeat, simply press the 'Print' key again. If misfeeding occurs, correct it, then push the 'Print' key to resume copying right where you left off. An 'Interrupt-Copy' key lets the user stop copying in mid-cycle so he can do a more urgent job.

Electronic 'Sensor Touch' keyboard

The entire control panel incorporates Mita's new, electronic 'Sensor Touch' keyboard for easier, more positive operation.



Specifications

Process	Indirect Dual Component Dry Toner
Type	Table-Top
Originals	Sheets, Books, 3-D Objects
Copy Sizes	Max. 11"×17" Min. 5½"×8½"
Copying Speed	15 Copies Per Minute (Any Size)
Warm-Up Time	3 to 4 Minutes
First Copy	5 Seconds (8½"×11")
Magnification	1:1
Light Source	Halogen Lamp
Multiple Copying	1 to 99 Copies
Paper Feed System	Automatic Sheet Feed (Dual Cassettes)
Cassette Capacity	Maximum Capacity—250 Sheets (20 lbs)×2
Toner Dispensing System	Automatic Toner Density Control
Power Source	115VAC, 60Hz
Dimensions	31.5"(L)×22.8"(D)×19.7"(H)
Weight	251 lbs.

*Specifications are subject to change without notice.